

## JS-570RX

- **HDBT™**
- **HDCP**
- **4K**
- **1080P/60Hz**
- **PoC**



### Overview


JS-570RX can be used as a receiver for the HDBaseT output from JS Long distance transmit interconnect box, it provides economical means of extending 1080p/ 60Hz video signals up to 70 meters.

### Product Features

- HDMI 1.4, HDCP 2.0compliant;
- Supports equalization, gain adjustment and clock recovery;
- Supports maximum 1080P/UXGA HD input, and output has the same resolution as the input;
- Easy installation and operation;
- No signal loss after transmitting for 70 meters if routed back;
- Link indicator light;
- HDCP protocol safe indicator light;
- With RS232 control capability;
- With IR Control.

### Main Specification

Receiver Input Port:	1 X Cat6 RJ45 8pin
Receiver Output Port:	1 X HDMI socket
Resolution	720P50/60、1080i 50/60HZ、1080p 50/60HZ
HDTV	640x480=VGA72、VGA75、VGA85
PC	800x600=SVGA56、SVGA60、SVGA72、SVGA75、SVGA85 1024x768=XGA60、XVG70、XGA75、XGA85 1280x1024=SXGA60、SXGA75、SXGA85 1600x1200=UXGA60 1920x1200=shorten edge blanking WUXGA

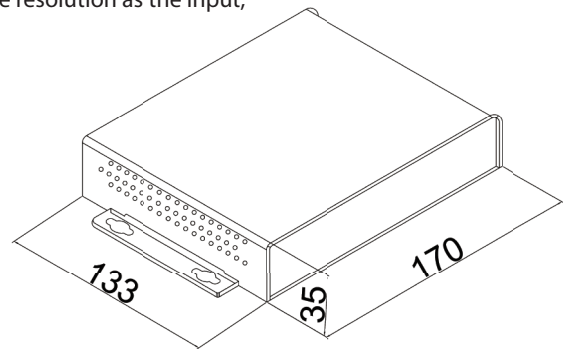

Overall Dimension( mm)

### Connection diagram

